Bruhath Bangalore Mahanagara Palike Dasarahalli Zone

Name of Work:Construction Of CC Roads & Drains Opp Govt.Hospital Mallasandra in Ward No.14, T.Dasarahalli Sub Division.

Est .Cost Rs.50.00 Lakhs

Sl No	Description of Items	Unit	No	L	B	D	Qty	Rate	Amount
1	KSRRB 300-3. Earthwork excavation by manual means in ordinary soil invoiving in average horizontal throw up to 2m & an average lift upto 1.5m , excavated surface leveled & sides neatly dressed , the disposed earth to be levelled neatly after breaking of clods complete as per specification MORTH/ Chapter 3. Page No. 141/ Item No. 19.1/ PWD SR 2015-16.								
	EW for RCC Drain & CC road								
	1st Cross	Cum	2	80.00	0.90	0.80	115.20		
	Elite Hotel Building Back Side Road Cross Road	Cum	2	35.00	0.80	0.80	44.80		
							160.00	83.16	**13305.60**
	Basic Rate	77.00							
	Area Weightage @ 8%	6.16							
		83.16							
2	KSRRB 300-50 Scarifying bituminous course 50mm to 75mm thick along with premix carpet / surface dressing by road roller attached with scarifier without disturbing the base and stacking the debris including cost of all labour charges, HOM of machineries complete as per Specification Morth / Chapter .3 Page No.146, Item No.19.56 / PWD SR.2015-16								
	2nd Cross Mallasandra Near Govt School Opp Road	Sqm	1	98.00	5.50		539.00		
	2nd A Cross		1	100.00	5.00		500.00		
	1st Cross		1	90.00	4.80		432.00		
	Cross Road		1	35.00	4.00		140.00		
							1611.00	30.24	**48716.64**
	Basic Rate	28.00							
	Area Weightage @ 8%	2.24							
		30.24							
3	KSRB 4-1.3 : Providing and laying in position plain cement concrete of mix 1:4:8 with OPC cement @ 180kgs, with 40mm and down size graded granite metal coarse aggregates @0.85cum and fine aggregates @ 0.57cum machine mixed, machine mixed, concrete laid in layers not exceeding 15 cms. thick, well compacted, in foundation, including cost of all materials, labour, HOM of machinery, curing complete as per specifications. Specification No. KBS 4.1,4.2 Page No.12/ Item No. 4.3/ PWD SR 2015-16								
		Cum	2	80.00	0.90	0.15	21.60		
			1	98.00	5.50	0.15	80.85		
			1	100.00	5.00	0.15	75.00		
			1	90.00	4.80	0.15	64.80		
			1	35.00	4.00	0.15	21.00		
							263.25	5070.60	**1334835.45**
	Basic Rate	4695.00							
	Area Weightage @ 8%	375.60							
	Total	**5070.60**							

4	KSRB 4.2.2 : Providing and laying in position reinforced cement concrete of design mix M20 with OPC cement @ 320kgs, with with 20mm and down size graded granite metal, coarse aggregate @ 0.69 cum and fine aggregates @ .460cum, with super plasticisers @ 3 liters confirming to is 9103-1999 reafairmed 2008, machine mixed, concrete laid in layers not exceeding 15 cms thick, vibrated for all works in foundation for footings,pedastals,retaining walls, staircase, retaining walls, return walls, walls (any thickness) including attached plasters, columns, piers, abutments, pillars, posts, struts, buttresses, string or lacing courses, parapets, bed blocks, anchor blocks, plain window cills, fillets etc., including cost of all materials, labour, HOM of machinery, curing, complete as per specifications. Specification No. KBS 4.1, 4.5 ,P.13/I.4.11/ PWD SR 2015-16								7
		Cum	2x2	80.00	0.15	0.90	43.20		
			2	80.00	0.90	0.15	43.20		
			2x2	35.00	0.15	0.90	18.90		
	For Covering		2	35.00	0.90	0.15	18.90		
					Net Qty		**124.20**	6198.12	**769806.50**
	Basic Rate	5739.00							
	Area Weightage @ 8%	459.12							
	Total	**6198.12**							
5	KSRB 4.9.2: Providing T.M.T steel reinforcement for R.C.C work including straightening, cutting, bending, hooking, placing in position, lapping and / or welding wherever required, tying with binding wire and anchoring to the adjoining members wherever necessary complete as per design (laps, hooks and wastage shall not be measured and paid) cost of materials, labour, HOM of machinery complete as per specifications.Specification No. KBS 4.6.3, TMT bars Fe 500. Page No. 17/ Item No. 4.46.2/ PWD SR 2015-16								
		Qtls		124.20	x	60kgs	7452.00		
							say		
							74.52	6980.58	**520193.00**
	Basic Rate	6463.50							
	Area Weightage @ 8%	517.08							
	Total	**6980.58**							
6	Providing & laying cement concrete using 20mm and down size granite coarse aggregate and fine aggregate of ready mixed concrete RMC M20 for RCC works laid in 15cm thick layers and well compacted vibrating,curing,for raft foundation column footing,main and secondary beams with all lead and lift etc,complete (exclusive of cost of steel and fabrication charges Page No.18/ Item No. 4.48/ PWD SR 2015-16								
	2nd Cross Mallasandra Near Govt School Opp Road		1	98.00	5.50	0.13	70.07		
	2nd A Cross		1	100.00	5.00	0.13	65.00		
	1st Cross		1	90.00	4.80	0.13	56.16		
			1	35.00	4.00	0.13	18.20		
							209.43	6332.04	**1326119.14**
	Basic Rate	5863.00							
	Area Weightage @ 8%	469.04							
	Total	**6332.04**							
7	KSRB 4-6.9: Providing and removing centering, shuttering, strutting, propping etc., and removal of form work for vertical surface such as walss at any thickness,including attached pilasters,buttresses, plinth and string courses cost of all materials, labour complete as per specification. Specification No. KSRB 4.6.9. exceeding 1m in depth. Page No. 15/ Item No. 4.31/ PWD SR 2015-16						Sqm		
		Sqm	2x4	80.00		0.80	512.00		
			2x4	35.00		0.80	224.00		
							736.00	306.72	**225745.92**
	Basic Rate	284.00							

	Basic Rate	284.00							6
	Area Weightage @ 8%	22.72							
		306.72							
8	Providing & laying reinforeced cement precast slabs of mix CC 1:11/2:3 using 20mm & down size graded Granite metal using HYSD 10mm dia steel @ 100mm c/c both ways & Complete as per specfications.								
		Sqm	2	80.00		0.90	144.00		
	Missed Slabs		2	35.00		0.90	63.00		
	Approved Rate of Precast slab	1600					**207.00**	1600	**331200.00**
9	Disposal of debris to the final place of disposal with all lead and lift and as direction by the engineer in charge of the work, lead 10 Km a) Basic rate for haulage of materials as per item No. 17.4/KSRRB : M100-4.1 ..... Rs. 2.00 Tonne/Km b) Average earth of work 1.28 Tonne/Km for Rs. 2.00/Km c) Add loading and unloading Item No. 17.1 KSRRB M 100-1 Rs. 68.00 (P.133 I.18.57/1) 2015-16								
	Qty Vide Item No=1	Cum					**160.00**		
	Qty Limited to						**160.00**	81.73	**13077.50**
	(For 3 km = 3 x 1.28 x 2.0)	7.68							
	Loading and Unloading Charges	68.00							
		75.68							
	Area Weightage @ 8%	6.05							
	Total	**81.73**							
								Sub Total	**4582999.76**
10	KRIDL Charges 8%								**366640.00**
11	QC Charges 1%								**50000.00**
12	Miscellaneous and unforseen Charges								**360.24**
								Total	**5000000.00**

(Rupees Fifty Lakhs Only)

CERTIFICATE

1 The Work spot has been inspected and the work found to be necessary
2 The Estimate is prepared as per the PWD SR 2015-16
3 The Provision made in estimate are adequate and essential
4 This area comes under BBMP limits.

Asst Engineer
Ward No-14

Asst Executive Engineer
T.Dasarahalli Sub-Division
BBMP

Executive Engineer
Dasarahalli Zone
BBMP

ನಂ.CE/D2/TS/69/2016-17 ದಿನಾಂಕ : 14-11-2016
ರೂ. 50.00 Lakhs [Rupees Fifty Lakhs only]
ಗಳ ಅಂದಾಜು ಪಟ್ಟಿಗೆ ತಾಂತ್ರಿಕ ಮಂಜೂರಾತಿ ನೀಡಿದೆ.
ಮುಖ್ಯ ಅಭಿಯಂತರರು
ತಾಂತ್ರಿಕ ಸಹಾಯಕರು ಬ.ಜ.ಬಂ.ಪಾ.
ದಾಸರಹಳ್ಳಿ ವಲಯ, ಬೆಂಗಳೂರು.

ನಂ.JC/D/AS/PR/51/16-17 ದಿನಾಂಕ : 14/11/16
ರೂ. 50.00 lakhs (Rupees fifty lakhs Only)
ಗಳ ಅಂದಾಜು ಪಟ್ಟಿಗೆ ಆಡಳಿತಾತ್ಮಕ ಮಂಜೂರಾತಿ ನೀಡಿದೆ
ಜಂಟಿ ಆಯುಕ್ತರು
ಬೃಹತ್ ಬೆಂಗಳೂರು ಮಹಾನಗರ ಪಾಲಿಕೆ
ದಾಸರಹಳ್ಳಿ ವಲಯ, ಬೆಂಗಳೂರು.

Name of work :- ~~Construction~~ of C.C roads and drains opp Govt Hospital Mallasandra. in W No 14

N

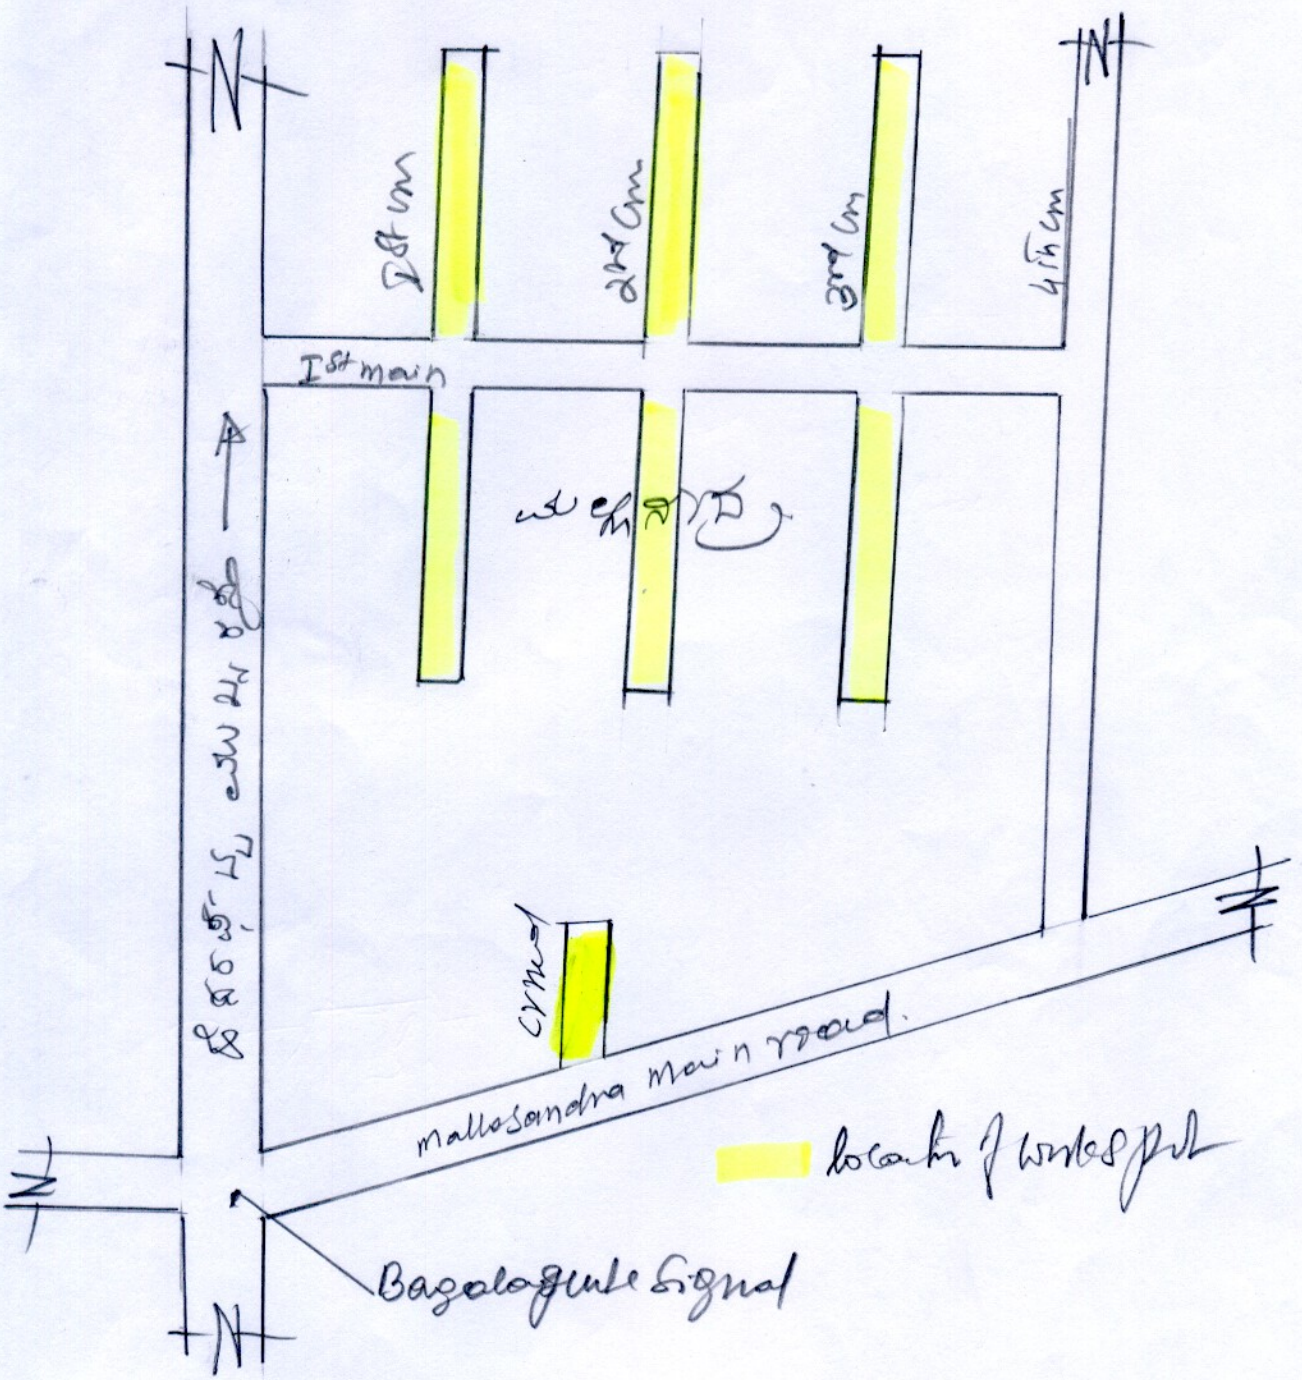

Executive Engineer
Municipal Corporation
Yelahanka, Bangalore

Name of work :- ~~Construction~~ of C.C roads and drains opp Govt Hospital Mallasandra. in W No 14

N

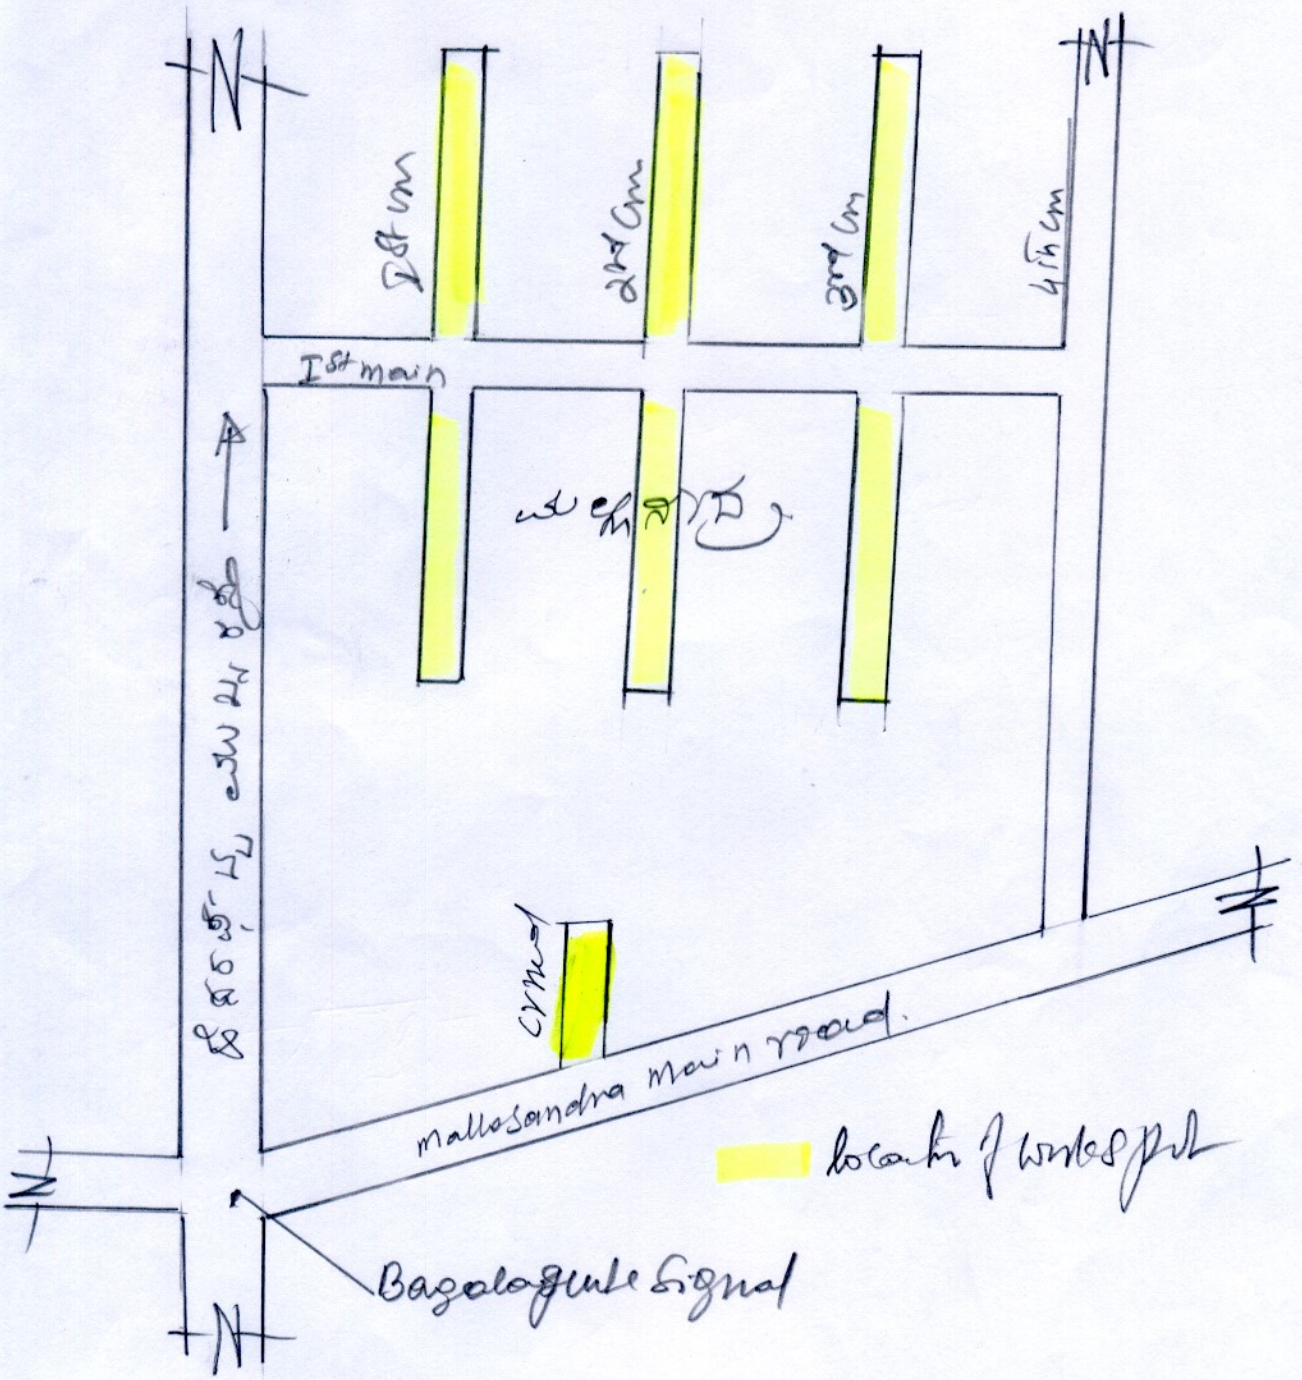

Executive Engineer
Municipal Corporation
Yelahanka, Bangalore